


Manufactured in accordance with EN13706
 Colour: Holly Green RAL6005
 Dimensions in accordance with BSEN1722-12 2016 Standard.
 Refer to drawing JT16-3517 GA-001 rev B01 for project specific notes.

Installation Detail

Detail	Description
(a) Post concrete surround	Post concrete surround shall be a minimum 350mm of post mix or similar NB. Concrete should be worked into the post securing holes.
(b) Fish Tails	Pass fish tails through top and bottom post slots. Lift panel to hang by the rail on these. Use quick release clamps to hold in place. Drill fish tail through the hole in rail to align, using 10mm drill bit. Fix both, and panel hanging together with shear Nuts provided.
(c) Centre Stays	To fit shear nuts provided: Drill 8mm hole through 400mm centre stay, and secure with shear nut through angle rail. Centre stays should be surrounded with a minimum 150mm concrete where they enter the ground

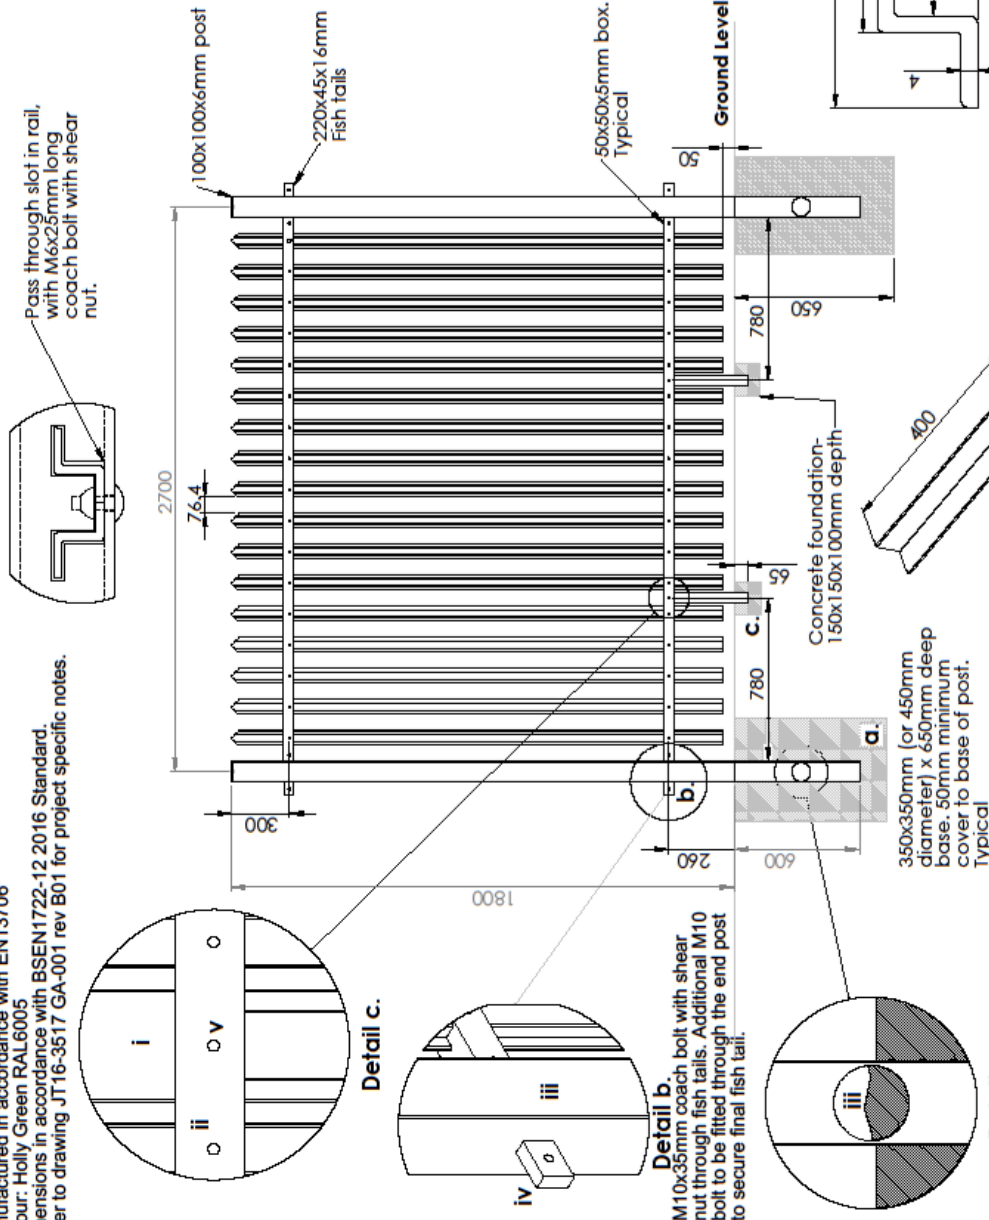

Detail a.
 Concrete worked into securing holes

Detail b.
 M10x35mm coach bolt with shear nut through fish tails. Additional M10 bolt to be fitted through the end post to secure final fish tail.

Detail c.

Centre Stay- 50x50x5mm angle

KEY	
i - Pale	
ii - Box Rail	
iii - Post	
iv - Fish Tail	
v - Shear Nuts	
vi - Centre Stay	

REVISIONS		Changes Made		Title/Name	
Date	Modified				
19/05/2017		Weight	N/A	Material	N/A
		Revision No.	C01	Finish	N/A
		Drawing Sheet Size	A3		

1.8m high x 2.7m wide fence panel
 Installation Detail

Sheet 1 of 1
 DRAWING NUMBER
 JT16-3517 GA-004



Projectwise Ref: 121926CPL-DK6-ELY-300108